

DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

Product Information

Common features of Crastin® thermoplastic polyester resin include mechanical and physical properties such as stiffness and toughness, heat resistance, friction and wear resistance, excellent surface finishes and good colourability. Crastin® thermoplastic polyester resin has excellent electrical insulation characteristics and high arc-resistant grades are available. Many flame retardant grades have UL recognition (class V-0). Crastin® thermoplastic polyester resin typically has high chemical and heat ageing resistance.

The good melt stability of Crastin® thermoplastic polyester resin normally enables the recycling of properly handled production waste.

If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-24 kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Crastin® thermoplastic polyester resin typically is used in demanding applications in the electronics, electrical, automotive, mechanical engineering, chemical, domestic appliances and sporting goods industry.

Crastin® HR5315HF is a 15% glass reinforced PBT with high flow (HF), moderately toughened, hydrolysis resistant (HR) resin. Excellent balance of properties between terminal pullout and impact resistance. Developed for USCAR Class 3 and 4 environments.

Product information	Value	Unit	Test Standard
Resin Identification	PBT-IGF15	-	ISO 1043
Part Marking Code	PBT-IGF15	-	ISO 11469
Rheological properties	Value	Unit	Test Standard
Melt volume-flow rate	12	cm ³ /10min	ISO 1133
Temperature	250	°C	ISO 1133
Load	2.16	kg	ISO 1133
Melt mass-flow rate	27	g/10min	ISO 1133
Viscosity number	95	cm ³ /g	ISO 307, 1157, 1628
Molding shrinkage, parallel	0.5	%	ISO 294-4, 2577
Molding shrinkage, normal	1.1	%	ISO 294-4, 2577
Flow length	430	mm	-
Flow length - pressure	80	MPa	-
Flow length - width/thickness	2	mm	-
Mechanical properties	Value	Unit	Test Standard
Tensile Modulus	5200	MPa	ISO 527-1/-2
Stress at break	95	MPa	ISO 527-1/-2
Strain at break	3.3	%	ISO 527-1/-2
Flexural Modulus	4700	MPa	ISO 178
Flexural Strength	150	MPa	ISO 178
Tensile creep modulus			ISO 899-1
1h	5000	MPa	
1000h	4200	MPa	
Charpy impact strength			ISO 179/1eU
73 °F	60	kJ/m ²	
-22 °F	30	kJ/m ²	
Charpy notched impact strength			ISO 179/1eA
73 °F	10	kJ/m ²	
-22 °F	7	kJ/m ²	
Izod notched impact strength			ISO 180/1A
73 °F	10	kJ/m ²	
-22 °F	10	kJ/m ²	
-40 °F	6	kJ/m ²	
Izod impact strength			ISO 180/1U
73 °F	45	kJ/m ²	
-22 °F	40	kJ/m ²	
-40 °F	30	kJ/m ²	

Revised: 2019-03-22

Page: 1 of 12

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

Hardness, Rockwell, R-scale	115	-	ISO 2039-2
Thermal properties	Value	Unit	Test Standard
Melting temperature, 18°F/min	225	°C	ISO 11357-1/-3
Glass transition temperature, 18°F/min	65	°C	ISO 11357-1/-2
Temp. of deflection under load			ISO 75-1/-2
260 psi	200	°C	
65 psi	220	°C	
Coeff. of linear therm. expansion, parallel	41	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110	E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.26	W/(m K)	-
Spec. heat capacity of melt	1860	J/(kg K)	-
Flammability	Value	Unit	Test Standard
Burning Behav. at 60mil nom. thickn.	HB	class	IEC 60695-11-10
Thickness tested	1.5	mm	IEC 60695-11-10
Oxygen index	20	%	ISO 4589-1/-2
Glow Wire Flammability Index, 120mil	700	°C	IEC 60695-2-12
Glow Wire Ignition Temperature, 120mil	775	°C	IEC 60695-2-13
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80	mm/min	ISO 3795 (FMVSS 302)
Electrical properties	Value	Unit	Test Standard
Relative permittivity			IEC 62631-2-1
100Hz	3.8	-	
1MHz	3.6	-	
Dissipation factor			IEC 62631-2-1
100Hz	100	E-4	
1MHz	100	E-4	
Volume resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface resistivity	1E13	Ohm	IEC 62631-3-2
Electric strength	42	kV/mm	IEC 60243-1
Comparative tracking index	350	-	IEC 60112
Other properties	Value	Unit	Test Standard
Humidity absorption, 80mil	0.15	%	Sim. to ISO 62
Water absorption, 80mil	0.4	%	Sim. to ISO 62
Density	1370	kg/m ³	ISO 1183
Density of melt	1140	kg/m ³	-
Injection	Value	Unit	Test Standard
Drying Recommended	yes		-
Drying Temperature	≥120	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.04	%	-
Melt Temperature Optimum	250	°C	-
Min. melt temperature	240	°C	-
Max. melt temperature	260	°C	-
Mold Temperature Optimum	80	°C	-
Min. mold temperature	30	°C	-
Max. mold temperature	130	°C	-
Hold pressure range	≥60	MPa	-
Hold pressure time	3	s/mm	-
Back pressure	As low as possible		-
Ejection temperature	170	°C	-
Characteristics			
Processing			• Injection Molding
Delivery form			• Pellets
Additives			• Release agent

Revised: 2019-03-22

Page: 2 of 12

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

Regional Availability

- North America
- Europe

- Asia Pacific
- South and Central America

- Near East/Africa
- Global

Processing Texts

Injection molding

Use of hot-runners is possible with Crastin® HR resins.

However we do not recommend temperature settings above 270°C and residence times at 265°C should be below 10 minutes.

In case of longer residence times using hot-runners, for example after a shut-down, the complete system must be purged with glass reinforced Crastin® (type SK602/605) before starting up again. For successful processing of Crastin® HR with hot-runners, care should be taken to maintain a uniform temperature, avoid hot-spots and long residence times.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11




DuPont™ Crastin® HR5315HF NC010


THERMOPLASTIC POLYESTER RESIN

Diagrams

Viscosity-shear rate

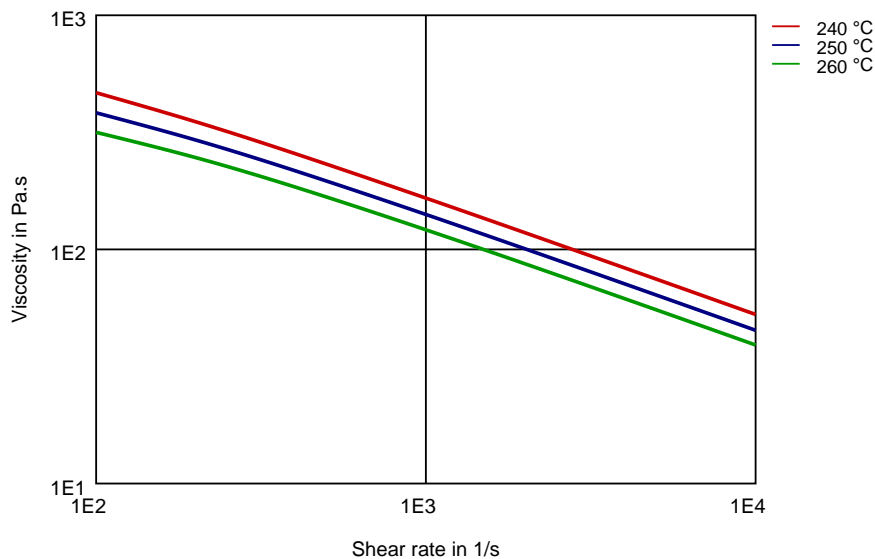


Shearstress-shear rate

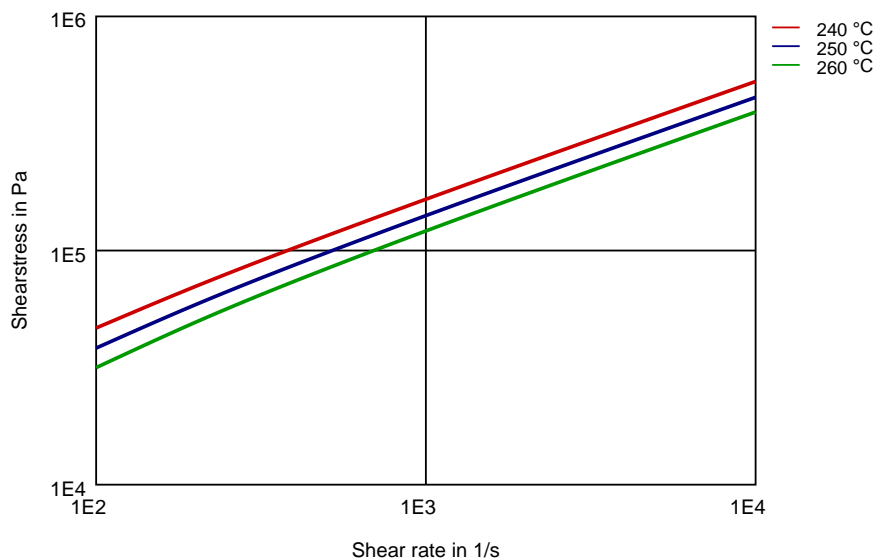


DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

Dynamic Shear modulus-temperature

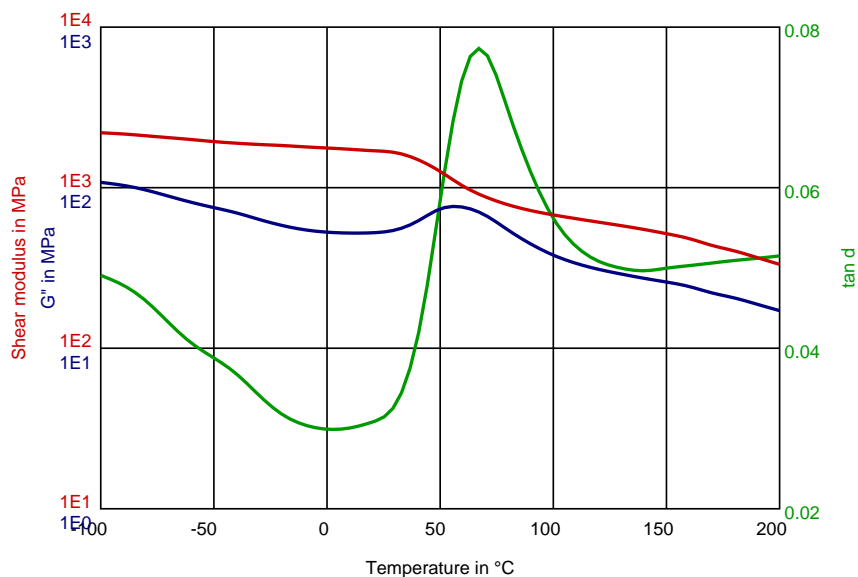


Dynamic Tensile modulus-temperature

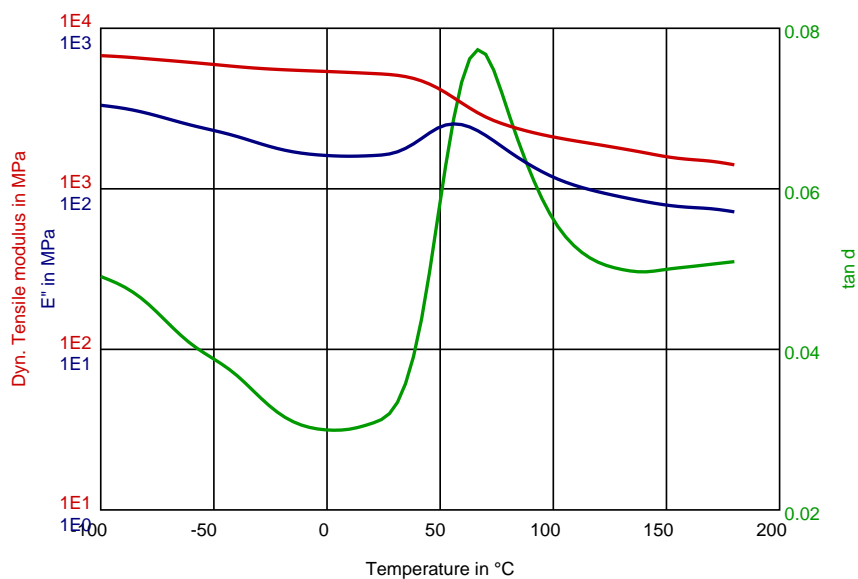

DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

Stress-strain

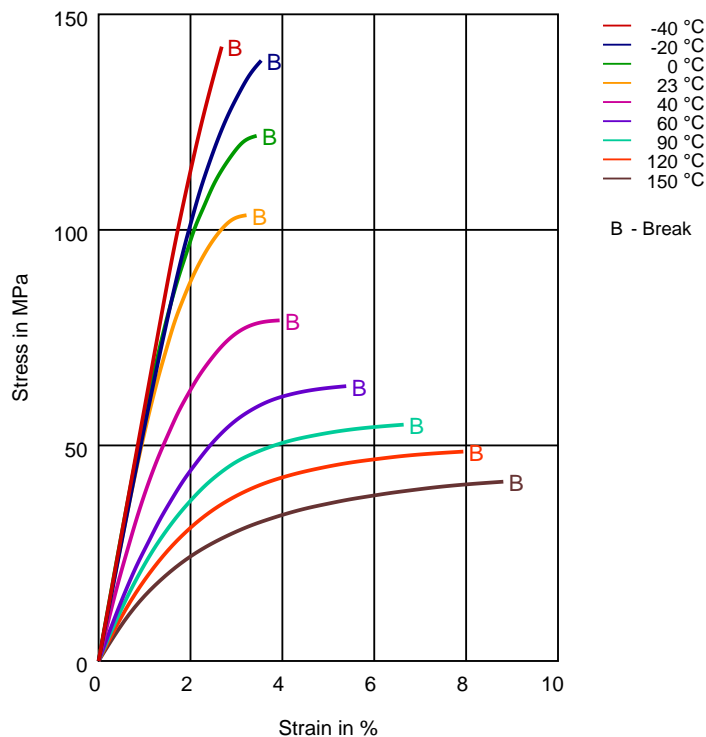

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

Secant modulus-strain

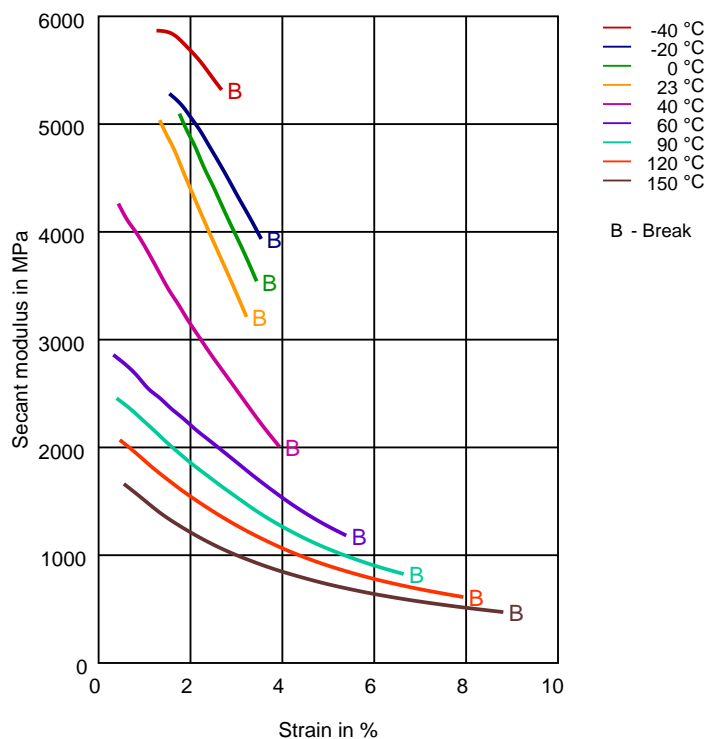

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

Stress-strain (isochronous) 23°C

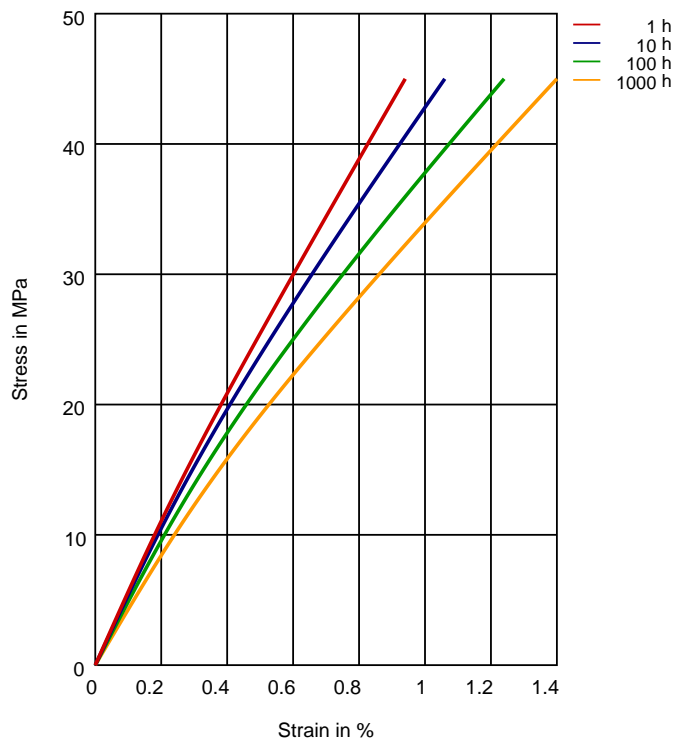

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11




DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

Creep modulus-time 23 °C

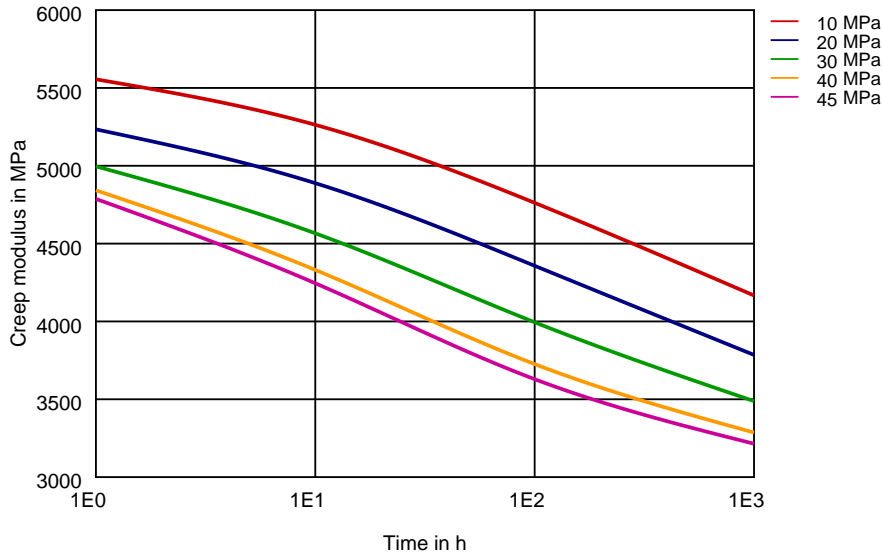

Specific volume-temperature (pVT)

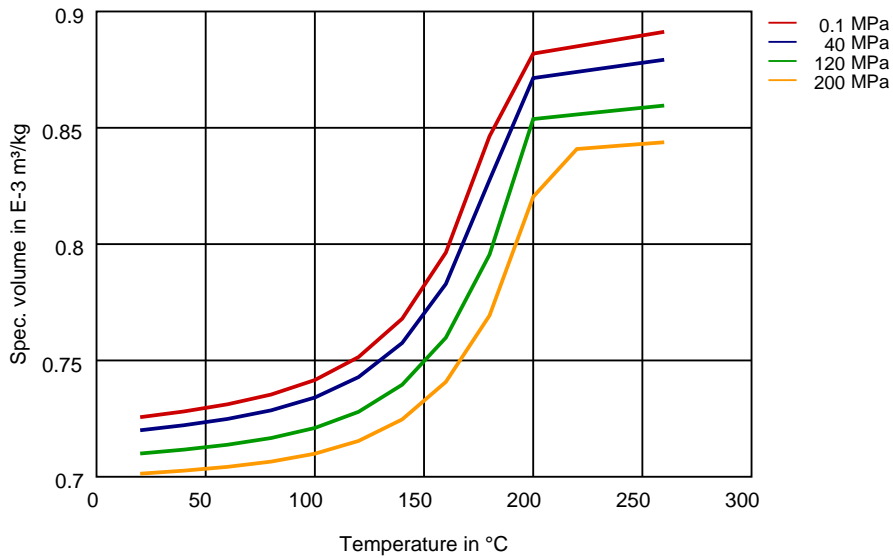

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

Tensile modulus-temperature

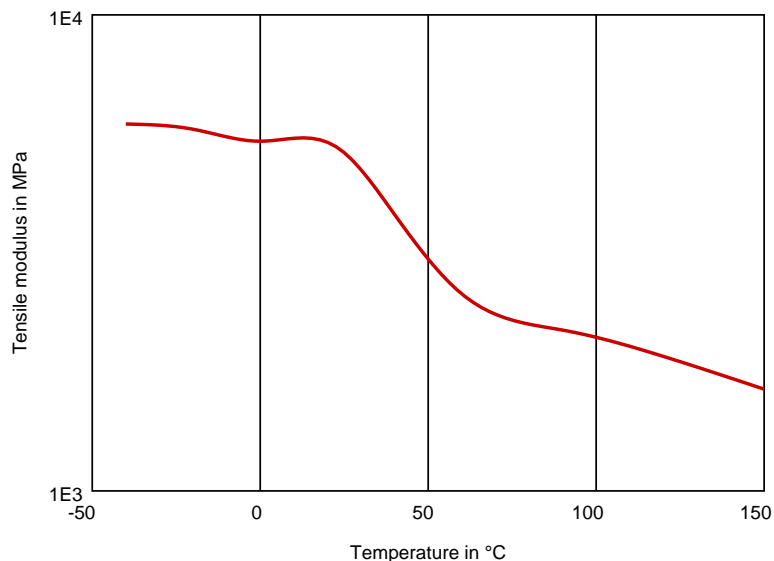

Revised: 2019-03-22

Page: 10 of 12

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11

Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✓ Citric Acid solution (10% by mass) (23 °C)
- ✓ Lactic Acid (10% by mass) (23 °C)
- ✗ Hydrochloric Acid (36% by mass) (23 °C)
- ✗ Nitric Acid (40% by mass) (23 °C)
- ✗ Sulfuric Acid (38% by mass) (23 °C)
- ✗ Sulfuric Acid (5% by mass) (23 °C)
- ✗ Chromic Acid solution (40% by mass) (23 °C)

Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✓ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23 °C)

Alcohols

- ✓ Isopropyl alcohol (23 °C)
- ✓ Methanol (23 °C)
- ✓ Ethanol (23 °C)

Hydrocarbons

- ✓ n-Hexane (23 °C)
- ✓ Toluene (23 °C)
- ✓ iso-Octane (23 °C)

Ketones

- ✓ Acetone (23 °C)

Ethers

- ✓ Diethyl ether (23 °C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23 °C)
- ✗ SAE 10W40 multigrade motor oil (130 °C)
- ✗ SAE 80/90 hypoid-gear oil (130 °C)
- ✓ Insulating Oil (23 °C)

Standard Fuels

- ✗ ISO 1817 Liquid 1 - E5 (60 °C)
- ✗ ISO 1817 Liquid 2 - M15E4 (60 °C)
- ✗ ISO 1817 Liquid 3 - M3E7 (60 °C)
- ✗ ISO 1817 Liquid 4 - M15 (60 °C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23 °C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23 °C)

Revised: 2019-03-22

Page: 11 of 12

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Crastin® HR5315HF NC010

THERMOPLASTIC POLYESTER RESIN

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✗ DOT No. 4 Brake fluid (130°C)
- ✗ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✗ Water (90°C)
- ✓ Phenol solution (5% by mass) (23°C)

Symbols used:

✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

DuPont™, the DuPont Oval Logo, and all products, unless otherwise noted, denoted with ™, ® or © are trademarks, service marks or registered trademarks of affiliates of DuPont de Nemours, Inc. © 2019 DuPont de Nemours, Inc. All rights reserved.

Revised: 2019-03-22

Page: 12 of 12

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.