

# DuPont™ Delrin® 100P NC010

## ACETAL RESIN

### Product Information

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and specialty grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

**Delrin® 100P is a high viscosity acetal homopolymer for use in easy-to-fill molds. Delrin® 100P provides a great combination of toughness and strength, improved processing thermal stability and productivity for injection molding, and low VOC emissions.**

Product information	Value	Unit	Test Standard
Resin Identification	POM	-	ISO 1043
Part Marking Code	POM	-	ISO 11469
Rheological properties	Value	Unit	Test Standard
Melt volume-flow rate	2.1	cm <sup>3</sup> /10min	ISO 1133
Temperature	190	°C	ISO 1133
Load	2.16	kg	ISO 1133
Melt mass-flow rate	2.5	g/10min	ISO 1133
Melt mass-flow rate, Temperature	190	°C	ISO 1133
Melt mass-flow rate, Load	2.16	kg	ISO 1133
Molding shrinkage, parallel	2.2	%	ISO 294-4, 2577
Molding shrinkage, normal	1.9	%	ISO 294-4, 2577
Mechanical properties	Value	Unit	Test Standard
Tensile Modulus	2900	MPa	ISO 527-1/-2
Yield stress	70	MPa	ISO 527-1/-2
Yield strain	26	%	ISO 527-1/-2
Nominal strain at break	45	%	ISO 527-1/-2
Flexural Modulus	2800	MPa	ISO 178
Flexural Stress at 3.5%	75	MPa	ISO 178
Tensile creep modulus			ISO 899-1
1h	2700	MPa	
1000h	1500	MPa	
Charpy impact strength			ISO 179/1eU
73°F	N	kJ/m <sup>2</sup>	
-22°F	400	kJ/m <sup>2</sup>	
Charpy notched impact strength			ISO 179/1eA
73°F	14	kJ/m <sup>2</sup>	
-22°F	13	kJ/m <sup>2</sup>	
Izod notched impact strength			ISO 180/1A
73°F	14	kJ/m <sup>2</sup>	
-40°F	12	kJ/m <sup>2</sup>	
Ball indentation hardness, H 358/30	173	MPa	ISO 2039-1
Hardness, Rockwell, M-scale	88	-	ISO 2039-2
Hardness, Rockwell, R-scale	119	-	ISO 2039-2
Thermal properties	Value	Unit	Test Standard
Melting temperature, 18°F/min	178	°C	ISO 11357-1/-3
Temp. of deflection under load			ISO 75-1/-2
260 psi	95	°C	
65 psi	155	°C	
260 psi, annealed	110	°C	
Vicat softening temperature			ISO 306
90°F/h, 11 lbf	160	°C	
90°F, 2 lbf	175	°C	
Coeff. of linear therm. expansion, parallel	110	E-6/K	ISO 11359-1/-2

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11



# DuPont™ Delrin® 100P NC010

## ACETAL RESIN

Coeff. of linear therm. expansion			ISO 11359-1/-2
normal	110	E-6/K	
Normal, -40-23°C	100	E-6/K	
Parallel, -40-23°C	100	E-6/K	
Thermal conductivity of melt	0.22	W/(m K)	-
Spec. heat capacity of melt	3000	J/(kg K)	-
RTI, electrical			UL 746B
30mil	50	°C	
60mil	110	°C	
120mil	110	°C	
RTI, impact			UL 746B
30mil	50	°C	
60mil	85	°C	
120mil	90	°C	
RTI, strength			UL 746B
30mil	50	°C	
60mil	90	°C	
120mil	95	°C	
<b>Flammability</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Burning Behav. at 60mil nom. thickn.	HB	class	IEC 60695-11-10
Thickness tested	1.5	mm	IEC 60695-11-10
UL recognition	yes	-	UL 94
Burning Behav. at thickness h	HB	class	IEC 60695-11-10
Thickness tested	0.8	mm	IEC 60695-11-10
UL recognition	yes	-	UL 94
Glow Wire Flammability Index			IEC 60695-2-12
40mil	550	°C	
80mil	550	°C	
120mil	550	°C	
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	50	mm/min	ISO 3795 (FMVSS 302)
<b>Electrical properties</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Relative permittivity			IEC 62631-2-1
100Hz	3.9	-	
1MHz	3.9	-	
Dissipation factor			IEC 62631-2-1
100Hz	35	E-4	
1MHz	55	E-4	
Volume resistivity	1E12	Ohm*m	IEC 62631-3-1
Surface resistivity	2E13	Ohm	IEC 62631-3-2
Electric strength	41	kV/mm	IEC 60243-1
Comparative tracking index	600	-	IEC 60112
<b>Other properties</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Humidity absorption, 80mil	0.3	%	Sim. to ISO 62
Water absorption, 80mil	1.4	%	Sim. to ISO 62
Density	1420	kg/m <sup>3</sup>	ISO 1183
Density of melt	1190	kg/m <sup>3</sup>	-
<b>VDA Properties</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Emissions	<8	mg/kg	VDA 275
<b>Injection</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Drying Recommended	yes		-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	215	°C	-
Min. melt temperature	210	°C	-

Revised: 2019-04-09

Page: 2 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

### Asia Pacific

Tel: +81 3 5521 8600

### Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

# DuPont™ Delrin® 100P NC010

## ACETAL RESIN

Max. melt temperature	220	°C	-
Mold Temperature Optimum	90	°C	-
Min. mold temperature	80	°C	-
Max. mold temperature	100	°C	-
Hold pressure range	90 - 110	MPa	-
Hold pressure time	8	s/mm	-
Annealing time, optional	30	min/mm	-
Annealing temperature	160	°C	-

Extrusion	Value	Unit	Test Standard
Drying Temperature	75 - 85	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	200	°C	-
Melt Temperature Range	195 - 205	°C	-

Characteristics			
Processing	<ul style="list-style-type: none"><li>• Injection Molding</li><li>• Profile Extrusion</li></ul>	<ul style="list-style-type: none"><li>• Sheet Extrusion</li><li>• Other Extrusion</li></ul>	
Delivery form	<ul style="list-style-type: none"><li>• Pellets</li></ul>		
Additives	<ul style="list-style-type: none"><li>• Lubricants</li></ul>	<ul style="list-style-type: none"><li>• Release agent</li></ul>	
Regional Availability	<ul style="list-style-type: none"><li>• North America</li><li>• Europe</li></ul>	<ul style="list-style-type: none"><li>• Asia Pacific</li><li>• South and Central America</li></ul>	<ul style="list-style-type: none"><li>• Near East/Africa</li><li>• Global</li></ul>

### Processing Texts

#### Injection molding

Drying is recommended, but not necessary for newly opened packaging stored in a dry location.

Follow the drying guidelines above in the following cases:

- If moisture is above the Processing Moisture Content recommendation,
- When a resin container is damaged,
- When the material is not properly stored in a dry place at room temperature, or
- When packaging stays open for a significant time.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11




# DuPont™ Delrin® 100P NC010


## ACETAL RESIN

### Diagrams

#### Viscosity-shear rate

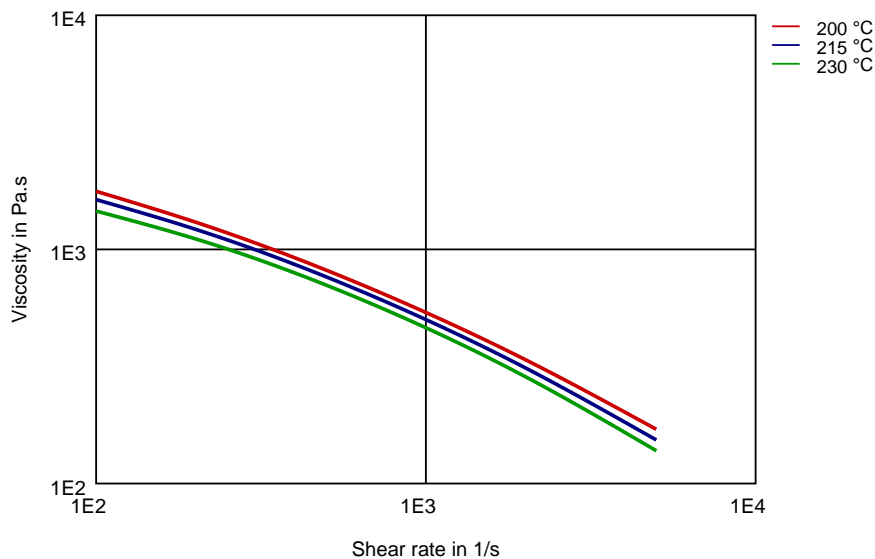


#### Shearstress-shear rate

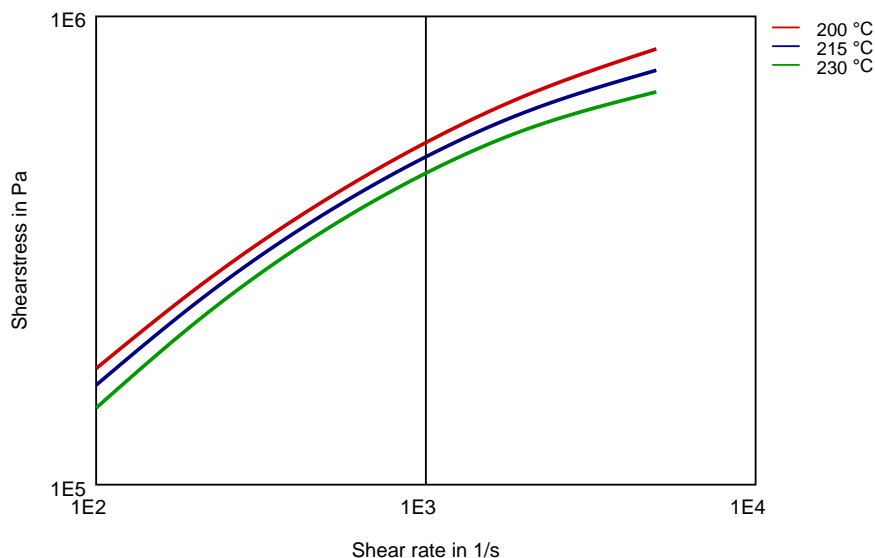

# DuPont™ Delrin® 100P NC010

## ACETAL RESIN

Dynamic Shear modulus-temperature

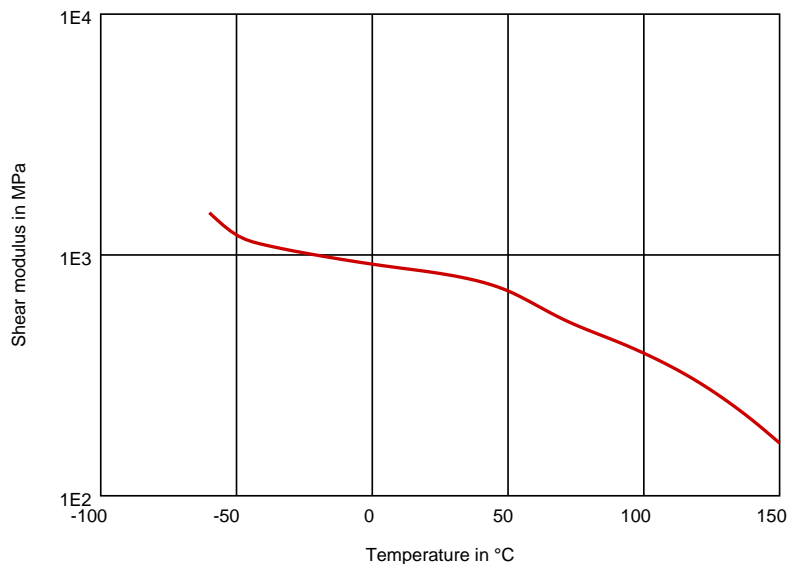

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

### Asia Pacific

Tel: +81 3 5521 8600

### Europe/Middle East/Africa


Tel: +41 22 717 51 11



# DuPont™ Delrin® 100P NC010

## ACETAL RESIN

Stress-strain

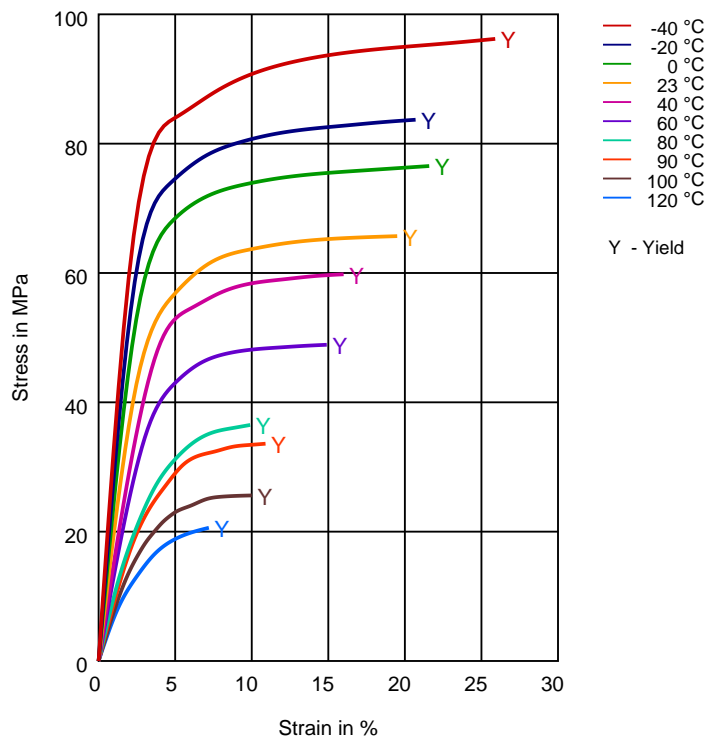

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

**North America**

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

**Asia Pacific**

Tel: +81 3 5521 8600

**Europe/Middle East/Africa**


Tel: +41 22 717 51 11



# DuPont™ Delrin® 100P NC010

## ACETAL RESIN

Secant modulus-strain

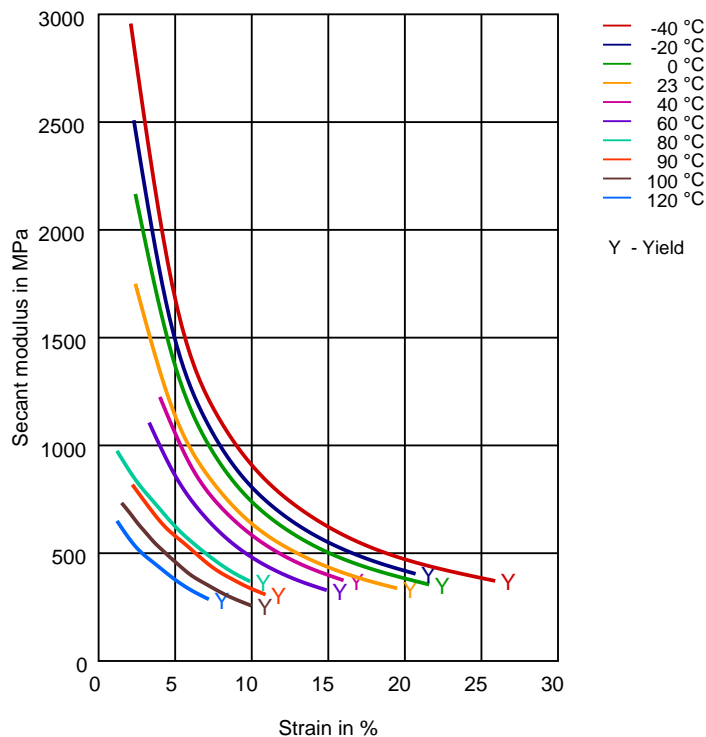

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

**North America**

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

**Asia Pacific**

Tel: +81 3 5521 8600

**Europe/Middle East/Africa**


Tel: +41 22 717 51 11




# DuPont™ Delrin® 100P NC010

## ACETAL RESIN

### Specific volume-temperature (pvT)

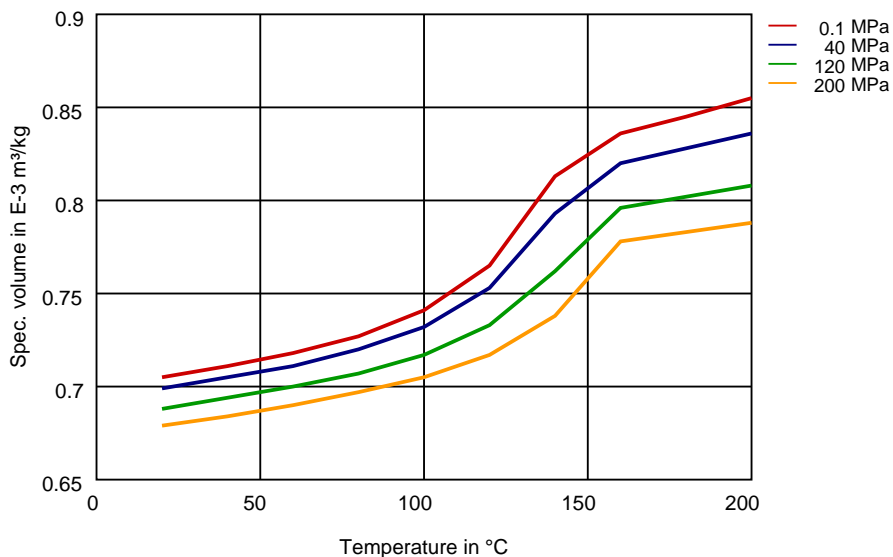

### Tensile modulus-temperature

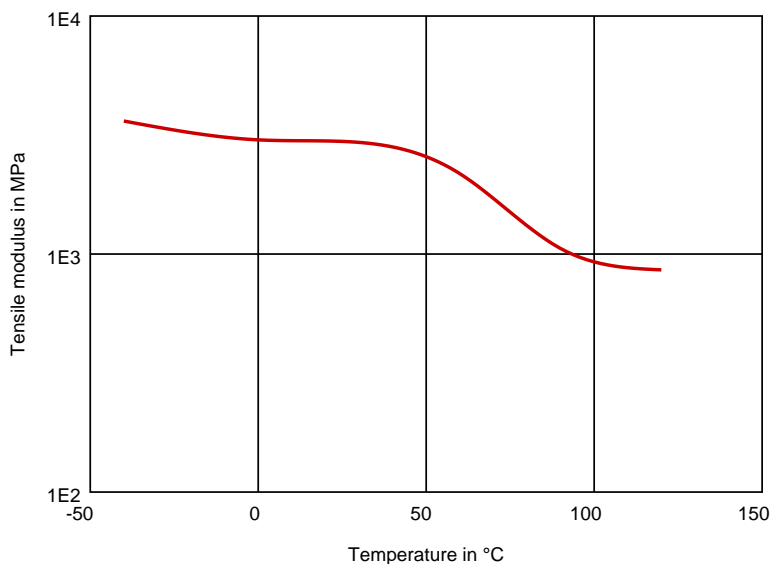

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11






# DuPont™ Delrin® 100P NC010

## ACETAL RESIN

Tensile Fatigue, 10Hz, R=0.1 mm

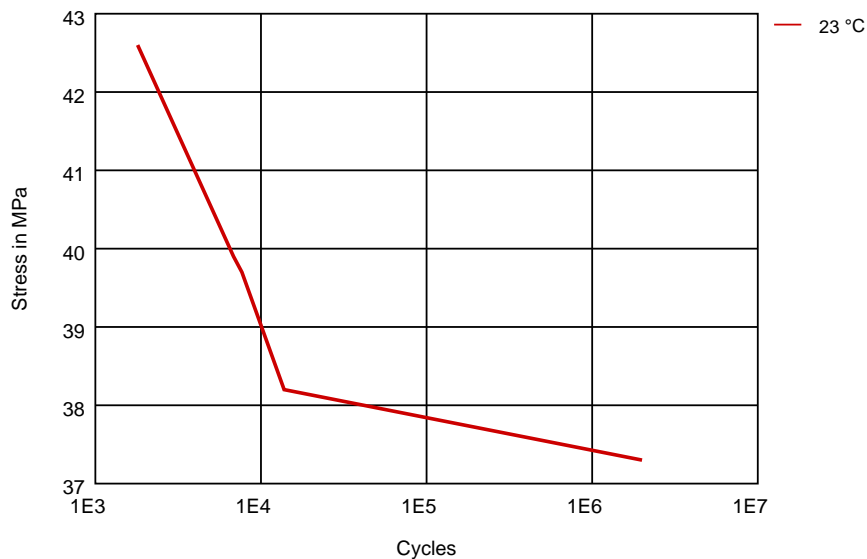

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

### Asia Pacific

Tel: +81 3 5521 8600

### Europe/Middle East/Africa

Tel: +41 22 717 51 11



# DuPont™ Delrin® 100P NC010

## ACETAL RESIN

### Chemical Media Resistance

#### Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✗ Citric Acid solution (10% by mass) (23 °C)
- ✗ Lactic Acid (10% by mass) (23 °C)
- ✗ Hydrochloric Acid (36% by mass) (23 °C)
- ✗ Nitric Acid (40% by mass) (23 °C)
- ✗ Sulfuric Acid (38% by mass) (23 °C)
- ✗ Sulfuric Acid (5% by mass) (23 °C)
- ✗ Chromic Acid solution (40% by mass) (23 °C)

#### Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✗ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✗ Ammonium Hydroxide solution (10% by mass) (23 °C)

#### Alcohols

- ✓ Isopropyl alcohol (23 °C)
- ✓ Methanol (23 °C)
- ✓ Ethanol (23 °C)

#### Hydrocarbons

- ✓ n-Hexane (23 °C)
- ✓ Toluene (23 °C)
- ✓ iso-Octane (23 °C)

#### Ketones

- ✓ Acetone (23 °C)

#### Ethers

- ✓ Diethyl ether (23 °C)

#### Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23 °C)
- ✗ SAE 10W40 multigrade motor oil (130 °C)
- ✗ SAE 80/90 hypoid-gear oil (130 °C)
- ✓ Insulating Oil (23 °C)

#### Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5 (60 °C)
- ✓ ISO 1817 Liquid 2 - M15E4 (60 °C)
- ✓ ISO 1817 Liquid 3 - M3E7 (60 °C)
- ✓ ISO 1817 Liquid 4 - M15 (60 °C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23 °C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23 °C)

Revised: 2019-04-09

Page: 10 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

# DuPont™ Delrin® 100P NC010

## ACETAL RESIN

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

### Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✗ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✗ Sodium Carbonate solution (20% by mass) (23°C)
- ✗ Sodium Carbonate solution (2% by mass) (23°C)
- ✗ Zinc Chloride solution (50% by mass) (23°C)

### Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✗ DOT No. 4 Brake fluid (130°C)
- ✗ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✗ Water (90°C)
- ✗ Phenol solution (5% by mass) (23°C)

#### Symbols used:

✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

DuPont™, the DuPont Oval Logo, and all products, unless otherwise noted, denoted with ™, ® or © are trademarks, service marks or registered trademarks of affiliates of DuPont de Nemours, Inc. © 2019 DuPont de Nemours, Inc. All rights reserved.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11

