

DuPont™ Crastin® LW9020 NC010

THERMOPLASTIC POLYESTER RESIN

Product Information

Common features of Crastin® thermoplastic polyester resin include mechanical and physical properties such as stiffness and toughness, heat resistance, friction and wear resistance, excellent surface finishes and good colourability. Crastin® thermoplastic polyester resin has excellent electrical insulation characteristics and high arc-resistant grades are available. Many flame retardant grades have UL recognition (class V-0). Crastin® thermoplastic polyester resin typically has high chemical and heat ageing resistance.

The good melt stability of Crastin® thermoplastic polyester resin normally enables the recycling of properly handled production waste.

If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-24 kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Crastin® thermoplastic polyester resin typically is used in demanding applications in the electronics, electrical, automotive, mechanical engineering, chemical, domestic appliances and sporting goods industry.

Crastin® LW9020 NC010 is a 20% glass fiber reinforced polybutylene terephthalate blend for injection molding. It has improved surface aesthetics, excellent dimensional stability and low warpage characteristics.

| Product information | Value | Unit | Test Standard |
|---|--------------|-------------------|-----------------|
| Resin Identification | PBT+ASA-GF20 | - | ISO 1043 |
| Part Marking Code | PBT+ASA-GF20 | - | ISO 11469 |
| Rheological properties | Value | Unit | Test Standard |
| Molding shrinkage, parallel | 0.3 | % | ISO 294-4, 2577 |
| Molding shrinkage, normal | 0.7 | % | ISO 294-4, 2577 |
| Mechanical properties | Value | Unit | Test Standard |
| Tensile Modulus | 7000 | MPa | ISO 527-1/-2 |
| Stress at break | 110 | MPa | ISO 527-1/-2 |
| Strain at break | 2.9 | % | ISO 527-1/-2 |
| Flexural Modulus | 6300 | MPa | ISO 178 |
| Flexural Strength | 170 | MPa | ISO 178 |
| Tensile creep modulus | | | ISO 899-1 |
| 1h | 6500 | MPa | |
| 1000h | 4800 | MPa | |
| Charpy impact strength | | | ISO 179/1eU |
| 73°F | 60 | kJ/m ² | |
| -22°F | 43 | kJ/m ² | |
| Charpy notched impact strength | | | ISO 179/1eA |
| 73°F | 9.5 | kJ/m ² | |
| -22°F | 7.5 | kJ/m ² | |
| Izod notched impact strength | | | ISO 180/1A |
| 73°F | 8 | kJ/m ² | |
| -22°F | 7 | kJ/m ² | |
| Izod impact strength | | | ISO 180/1U |
| 73°F | 50 | kJ/m ² | |
| -22°F | 50 | kJ/m ² | |
| Thermal properties | Value | Unit | Test Standard |
| Melting temperature, 18°F/min | 225 | °C | ISO 11357-1/-3 |
| Glass transition temperature, 18°F/min | 110 | °C | ISO 11357-1/-2 |
| Temp. of deflection under load | | | ISO 75-1/-2 |
| 260 psi | 150 | °C | |
| 65 psi | 210 | °C | |
| Vicat softening temperature, 90°F/h, 11 lbf | 145 | °C | ISO 306 |
| Ball pressure test | 190 | °C | IEC 60695-10-2 |
| Coeff. of linear therm. expansion, parallel | 30 | E-6/K | ISO 11359-1/-2 |
| Coeff. of linear therm. expansion, normal | 100 | E-6/K | ISO 11359-1/-2 |
| Thermal conductivity of melt | 0.25 | W/(m K) | - |

Revised: 2019-03-22

Page: 1 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Crastin® LW9020 NC010

THERMOPLASTIC POLYESTER RESIN

| | | | |
|--|--------------|-------------------|----------------------|
| Spec. heat capacity of melt | 1850 | J/(kg K) | - |
| RTI, electrical | | | UL 746B |
| 30mil | 130 | °C | |
| 60mil | 130 | °C | |
| 120mil | 130 | °C | |
| 240mil | 130 | °C | |
| RTI, impact | | | UL 746B |
| 30mil | 125 | °C | |
| 60mil | 125 | °C | |
| 120mil | 130 | °C | |
| 240mil | 130 | °C | |
| RTI, strength | | | UL 746B |
| 30mil | 130 | °C | |
| 60mil | 130 | °C | |
| 120mil | 130 | °C | |
| 240mil | 130 | °C | |
| Flammability | Value | Unit | Test Standard |
| Burning Behav. at 60mil nom. thickn. | HB | class | IEC 60695-11-10 |
| Thickness tested | 1.5 | mm | IEC 60695-11-10 |
| UL recognition | yes | - | UL 94 |
| Burning Behav. at thickness h | HB | class | IEC 60695-11-10 |
| Thickness tested | 0.75 | mm | IEC 60695-11-10 |
| UL recognition | yes | - | UL 94 |
| Oxygen index | 19 | % | ISO 4589-1/-2 |
| Glow Wire Flammability Index, 120mil | 650 | °C | IEC 60695-2-12 |
| Glow Wire Ignition Temperature, 120mil | 700 | °C | IEC 60695-2-13 |
| FMVSS Class | B | - | ISO 3795 (FMVSS 302) |
| Burning rate, Thickness 1 mm | 38 | mm/min | ISO 3795 (FMVSS 302) |
| Electrical properties | Value | Unit | Test Standard |
| Relative permittivity | | | IEC 62631-2-1 |
| 100Hz | 3.7 | - | |
| 1MHz | 3.4 | - | |
| Dissipation factor | | | IEC 62631-2-1 |
| 100Hz | 20.1 | E-4 | |
| 1MHz | 180 | E-4 | |
| Volume resistivity | >1E13 | Ohm*m | IEC 62631-3-1 |
| Surface resistivity | 1E14 | Ohm | IEC 62631-3-2 |
| Electric strength | 35 | kV/mm | IEC 60243-1 |
| Comparative tracking index | 550 | - | IEC 60112 |
| Electric Strength, Short Time | | | IEC 60243-1 |
| 1mm | 35 | kV/mm | |
| 2mm | 20 | kV/mm | |
| Other properties | Value | Unit | Test Standard |
| Humidity absorption, 80mil | 0.26 | % | Sim. to ISO 62 |
| Water absorption, 80mil | 0.78 | % | Sim. to ISO 62 |
| Density | 1350 | kg/m ³ | ISO 1183 |
| Density of melt | 1190 | kg/m ³ | - |
| VDA Properties | Value | Unit | Test Standard |
| Emission of organic compounds | 100 | µgC/g | VDA 277 |
| Odor test | 3.5 | class | VDA 270 |
| Injection | Value | Unit | Test Standard |
| Drying Recommended | yes | - | - |
| Drying Temperature | ≥120 | °C | - |
| Drying Time, Dehumidified Dryer | 2 - 4 | h | - |
| Processing Moisture Content | ≤0.04 | % | - |
| Melt Temperature Optimum | 250 | °C | - |

Revised: 2019-03-22

Page: 2 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Crastin® LW9020 NC010

THERMOPLASTIC POLYESTER RESIN

| | | |
|--------------------------|--------------------|---|
| Min. melt temperature | 240 °C | - |
| Max. melt temperature | 260 °C | - |
| Mold Temperature Optimum | 80 °C | - |
| Min. mold temperature | 30 °C | - |
| Max. mold temperature | 130 °C | - |
| Hold pressure range | ≥60 MPa | - |
| Hold pressure time | 3 s/mm | - |
| Back pressure | As low as possible | - |
| Ejection temperature | 170 °C | - |

Characteristics

| | | | |
|-----------------------|-----------------------------|---|--------------------------------|
| Processing | • Injection Molding | | |
| Delivery form | • Pellets | | |
| Additives | • Release agent | | |
| Regional Availability | • North America • Europe | • Asia Pacific • South and Central America | • Near East/Africa • Global |

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11




DuPont™ Crastin® LW9020 NC010


THERMOPLASTIC POLYESTER RESIN

Diagrams

Viscosity-shear rate

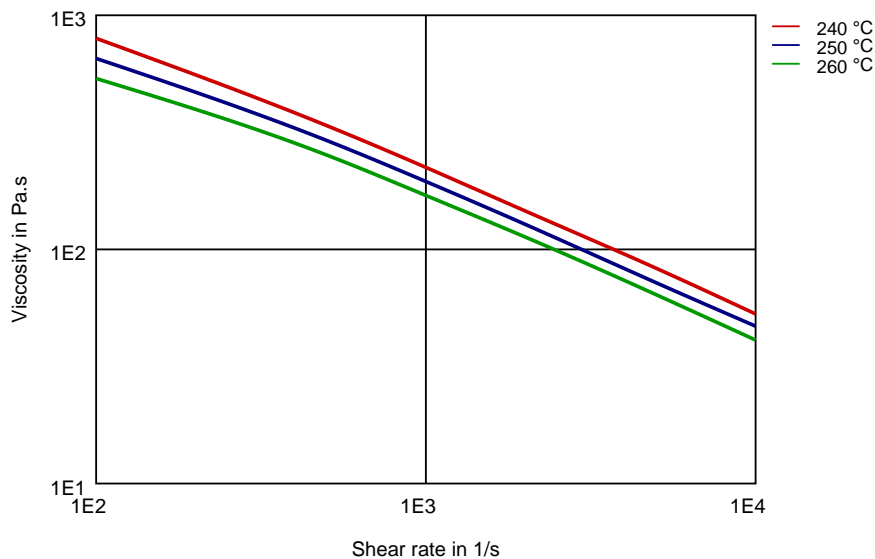


Shearstress-shear rate

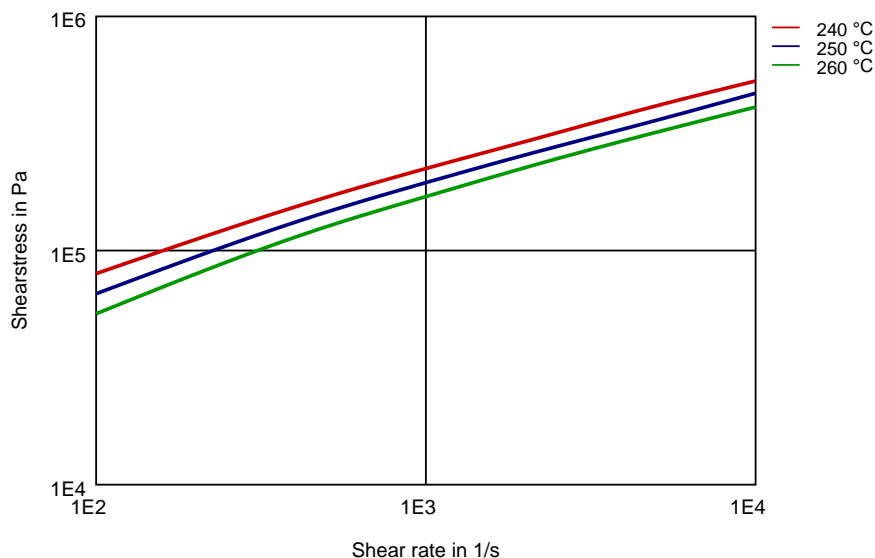


DuPont™ Crastin® LW9020 NC010

THERMOPLASTIC POLYESTER RESIN

Dynamic Shear modulus-temperature

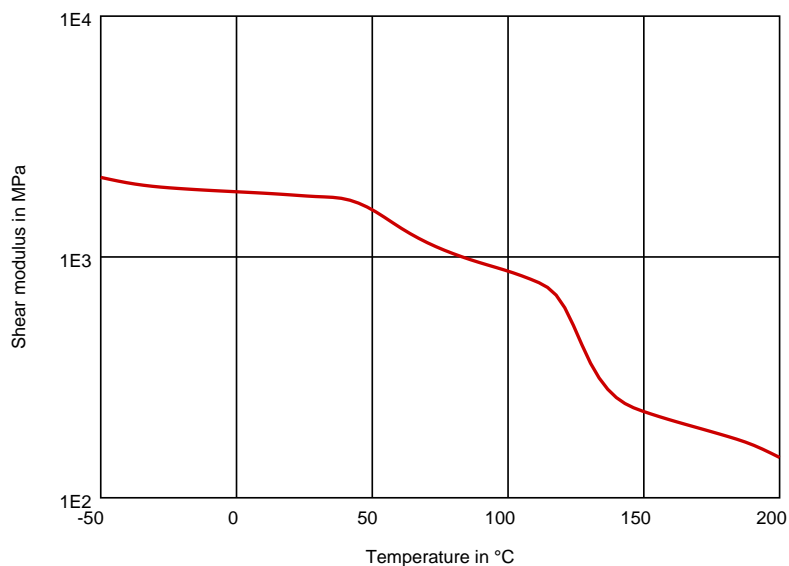


Dynamic Tensile modulus-temperature

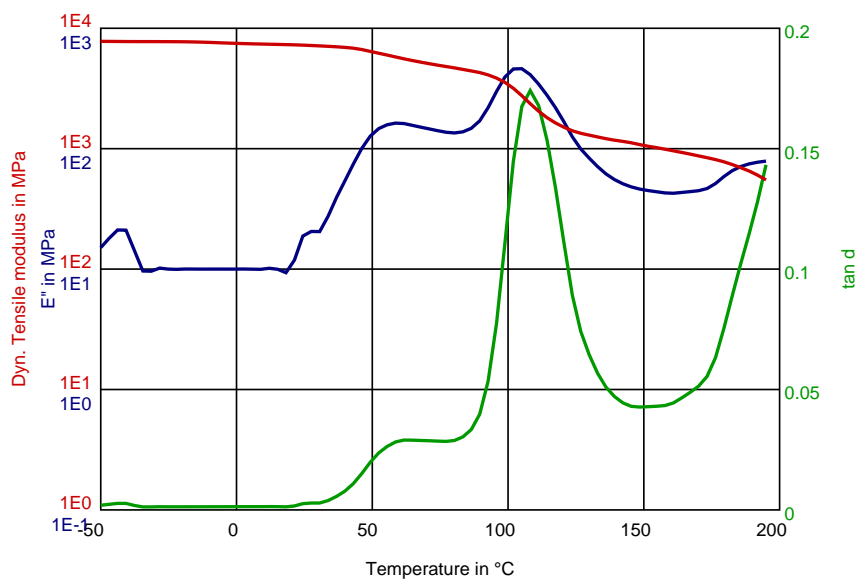

DuPont™ Crastin® LW9020 NC010

THERMOPLASTIC POLYESTER RESIN

Stress-strain

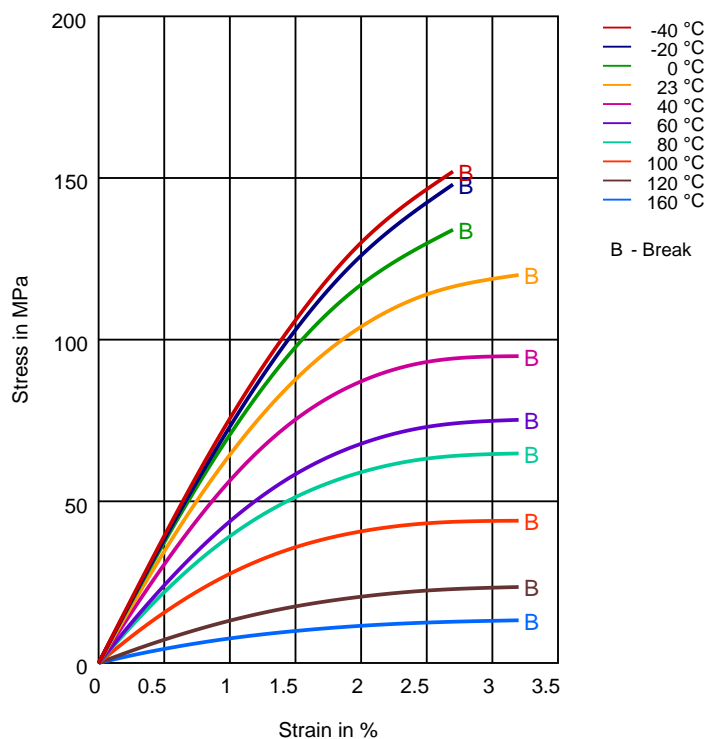

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Crastin® LW9020 NC010

THERMOPLASTIC POLYESTER RESIN

Secant modulus-strain

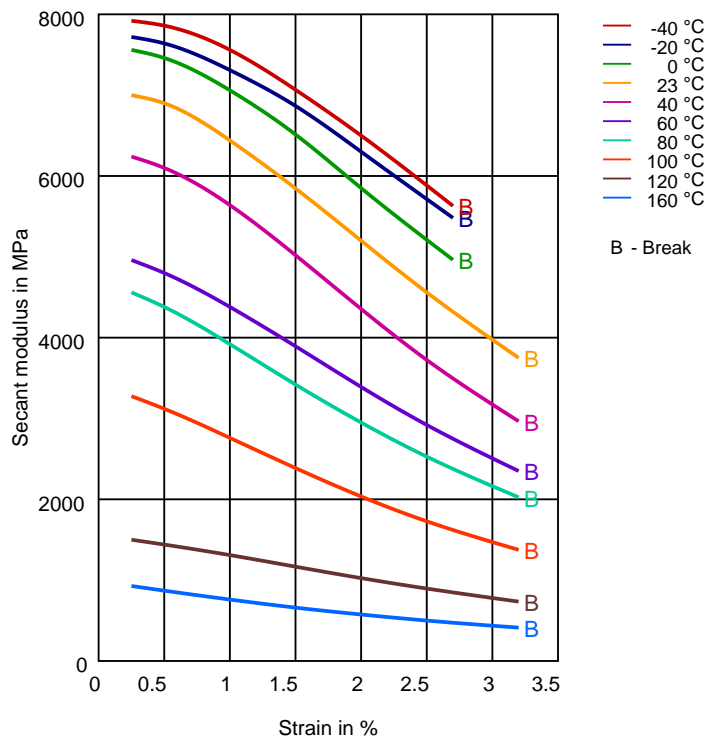

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Crastin® LW9020 NC010

THERMOPLASTIC POLYESTER RESIN

Stress-strain (isochronous) 23°C

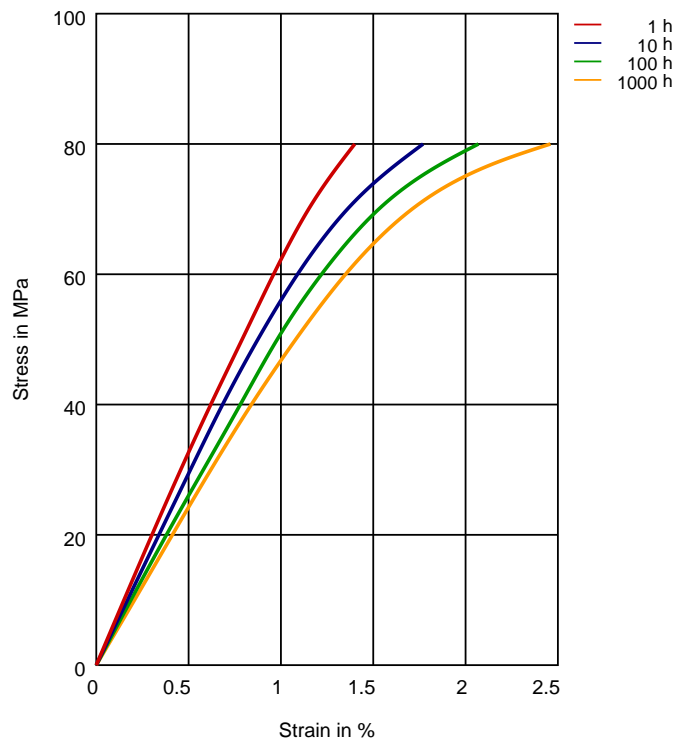

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Crastin® LW9020 NC010

THERMOPLASTIC POLYESTER RESIN

Creep modulus-time 23 °C

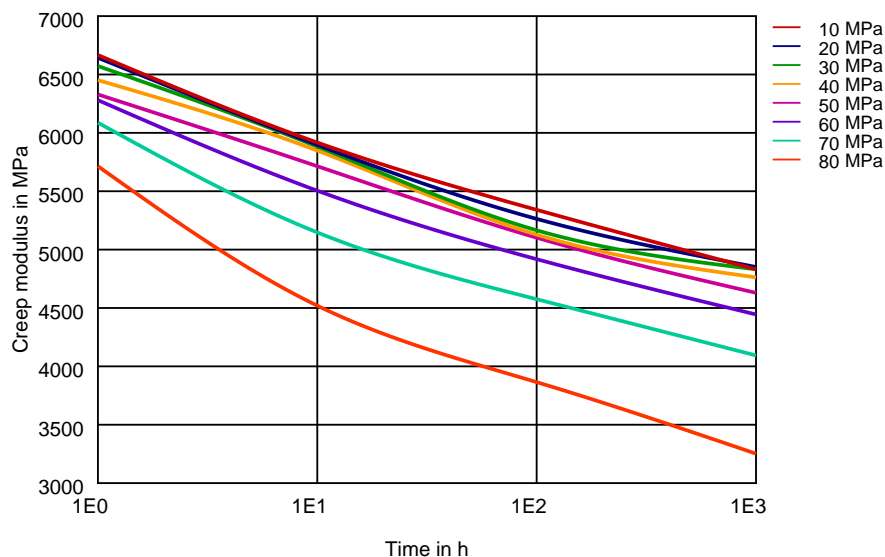

Revised: 2019-03-22

Page: 9 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Crastin® LW9020 NC010

THERMOPLASTIC POLYESTER RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✓ Citric Acid solution (10% by mass) (23 °C)
- ✓ Lactic Acid (10% by mass) (23 °C)
- ✗ Hydrochloric Acid (36% by mass) (23 °C)
- ✗ Nitric Acid (40% by mass) (23 °C)
- ✗ Sulfuric Acid (38% by mass) (23 °C)
- ✗ Sulfuric Acid (5% by mass) (23 °C)
- ✗ Chromic Acid solution (40% by mass) (23 °C)

Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✓ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23 °C)

Alcohols

- ✓ Isopropyl alcohol (23 °C)
- ✓ Methanol (23 °C)
- ✓ Ethanol (23 °C)

Hydrocarbons

- ✓ n-Hexane (23 °C)
- ✓ Toluene (23 °C)
- ✓ iso-Octane (23 °C)

Ketones

- ✓ Acetone (23 °C)

Ethers

- ✓ Diethyl ether (23 °C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23 °C)
- ✗ SAE 10W40 multigrade motor oil (130 °C)
- ✗ SAE 80/90 hypoid-gear oil (130 °C)
- ✓ Insulating Oil (23 °C)

Standard Fuels

- ✗ ISO 1817 Liquid 1 - E5 (60 °C)
- ✗ ISO 1817 Liquid 2 - M15E4 (60 °C)
- ✗ ISO 1817 Liquid 3 - M3E7 (60 °C)
- ✗ ISO 1817 Liquid 4 - M15 (60 °C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23 °C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23 °C)

Revised: 2019-03-22

Page: 10 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Crastin® LW9020 NC010

THERMOPLASTIC POLYESTER RESIN

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✗ DOT No. 4 Brake fluid (130°C)
- ✗ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✗ Water (90°C)
- ✓ Phenol solution (5% by mass) (23°C)

Symbols used:

✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

DuPont™, the DuPont Oval Logo, and all products, unless otherwise noted, denoted with ™, ® or © are trademarks, service marks or registered trademarks of affiliates of DuPont de Nemours, Inc. © 2019 DuPont de Nemours, Inc. All rights reserved.

Revised: 2019-03-22

Page: 11 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.